

**INDIAN SCHOOL MUSCAT**  
**DEPARTMENT OF PHYSICS**  
**RAPID REVISION FOR CLASS XII**



**IMPORTANT FORMULAE , LAWS & CONCEPTS IN CLASS XII PHYSICS**

**ELECTROSTATICS**

1.  $Q = ne$ , quantization of charge  $e = 1.6 \times 10^{-19}$  C.
2.  $F = \frac{q_1 q_2}{4\pi \epsilon_0 r^2}$   $F$ - electrostatic force in air or vacuum,  $q_1, q_2$  electric charges,  $r$ - distance,  
 $\epsilon_0 = 8.85 \times 10^{-12} \text{C}^2 \text{N}^{-1} \text{m}^{-2}$ .
3.  $\epsilon_r = F/F_M$   $F_M$ - electrostatic force in a medium ,  $\epsilon_r$ - relative permittivity or dielectric constant of a medium.
4.  $\epsilon_r = E/E_m$ ,  $E$  –electric field in air ,  $E_m$  - electric field in medium.
5.  $p = q(2a)$  ,  $p$  – dipole moment , $q$  - electric charge,  $2a$  – length of electric dipole ,  
vector quantity , its direction is from  $-q$  to  $+q$  , unit C m.
6. Electric field at axial point of a short dipole, same direction as that of dipole moment  
 $E = \frac{2p}{4\pi \epsilon_0 r^3}$  , vector quantity , unit V/m.
7. Electric field at equatorial line of dipole direction from  $+q$  to  $-q$ , opposite to that of dipole moment  
 $E = \frac{p}{4\pi \epsilon_0 (r^2 + a^2)^{3/2}}$ , for long dipole .  
 $E = \frac{p}{4\pi \epsilon_0 r^3}$  for a short dipole.
8. Torque  $\tau = \mathbf{p} \times \mathbf{E}$ ,  $\tau$ - torque,  $\tau = pE \sin\theta$ , direction of torque is perpendicular to  $\mathbf{p}$  and  $\mathbf{E}$ , obtained by right hand cork screw rule. vector quantity , unit Nm.
9. potential energy of a dipole  $U = -pE \cos\theta$ ,  
work done  $W = -pE(\cos\theta_f - \cos\theta_i)$  ,  $\theta_f$ – final orientation,  $\theta_i$ –initial orientation of dipole. unit J.

- 0 to 180° - potential energy = 2pE maximum, highly unstable equilibrium.
- 0 to 90° - potential energy = pE, large value, unstable equilibrium.
- 90° to 0 - potential energy = - pE, negative value, stable equilibrium.
- 180° to 0 - potential energy = - 2pE, minimum, highly stable equilibrium.

9. Electric potential at a point due to a point charge  $V = q / 4\pi \epsilon_0 r^2$ , scalar quantity unit volt.

10. Electric potential energy of a system of two charges  $U = q_1 q_2 / 4\pi \epsilon_0 r$ , unit J.

11. Relation between electric field strength E and electric potential V,  $E = -dV/dx$ , electric field is negative gradient of electric potential.

12. Electric flux  $\Phi = \mathbf{E} \cdot \mathbf{A} = EA \cos \theta$ , It is the number electric field lines passing an area normal to it. scalar quantity, unit Vm or Nm<sup>2</sup>/C.

13. Gauss theorem

The total Electric flux passing through a closed surface is equal to  $1/\epsilon_0$  times the total charge q enclosed by the surface.  $\Phi = \mathbf{E} \cdot \mathbf{A} = q / \epsilon_0$

14. Electric field at a point due to a linear charge  $E = \lambda / 2\pi \epsilon_0 r$ ,  $\lambda$  – linear charge density.


15. Electric field at a point due to a thin infinite plane sheet of charge.  $E = \sigma / 2 \epsilon_0$ ,  $\sigma$  – surface charge density.

16. Relation between charge Q, capacitance C, Potential V,  $Q = CV$ .

17. Energy stored in a capacitor  $U = \frac{1}{2} CV^2 = \frac{1}{2} QV = \frac{1}{2} Q^2 / 2C$ .

18. Common potential of two capacitors in parallel  $V = (C_1 V_1 + C_2 V_2) / C_1 + C_2$ .

19.



Area under the graph = energy stored in the capacitor =  $\frac{1}{2} CV^2$ .


Slope =  $Q/V = C$  - Capacitance of the capacitor.

20. Energy density  $U/\text{volume} = \frac{1}{2} \epsilon_0 E^2$ . Unit  $\text{J}/\text{m}^3$
21. Effective capacitance of a number of capacitances in parallel  $C_p = C_1 + C_2 + C_3 + \dots$   
for  $n$  identical capacitors  $C_p = n C$
22. Effective capacitance of a number of capacitances in series  $1/C_s = 1/C_1 + 1/C_2 + \dots$   
for  $n$  identical capacitors  $C_s = C/n$
23.  $C = \epsilon_0 A/d$  capacitance with out dielectric. Unit of C F or farad.
24.  $C = (\epsilon_0 \epsilon_r A)/d$  capacitance with dielectric.
25. Capacitors are used in i) ignition systems of automobiles , ii) radio tuning circuits .iii) blocking capacitor in a detector to block dc noise.

### CURRENT ELECTRICITY

1. Electric current  $I = q/t$ ,  $I = dq/dt$ ,  $q$  - charge ,  $t$ - time.
2.  $V_d = (eE\tau/m)$  ,  $V_d$  - drift velocity ,  $e$ - charge of electron ,  $E$ - electric field ,  $\tau$  - relaxation time,  $m$ - mass of electron.
3. Mobility  $\mu = \text{drift velocity} / \text{unit electric field} = e\tau/m$  .
4. Resistance of a conductor  $R = \rho l/A$  ,  $R = ml/ ne^2 A \tau$   $n$ -number of free electrons  $/\text{m}^3$  , conductance  $G = 1/R$
- 5 . Resistivity  $\rho = RA/l$  ,  $\rho = m/ne^2 \tau$  , Conductivity  $= \sigma = 1/\rho$ .

6 .



slope of the graph gives  $R = V/I$

7. Current density  $J = I/A$ , vector quantity ,  $\text{A}/\text{m}^2$   $J = \sigma E = E/\rho$

8. Effective resistance in parallel  $1/R_p = 1/R_1 + 1/R_2 + \dots$
9. Effective resistance in Series  $R_s = R_1 + R_2 + \dots$   
For n identical resistances  $R_s = n R$ .
9. Relation between emf  $\mathcal{E}$ , tpd V, and internal resistance r of a cell during discharging  
 $V = \mathcal{E} - Ir$ , during charging  $V = \mathcal{E} + Ir$ , In open circuit  $V = \mathcal{E}$ .
10. Series combination of n cells  $\mathcal{E}_T = n \mathcal{E}$ ,  $r_T = nr$ , parallel combination of n cells  $\mathcal{E}_T = \mathcal{E}$ ,  $r_T = r/n$ .
11. For n rows of m cells each  $\mathcal{E}_T = m \mathcal{E}$ ,  $r_T = m r/n$ .
12. When two different cells in parallel  $\mathcal{E}_T = (\mathcal{E}_1 r_2 + \mathcal{E}_2 r_1) / (r_1 + r_2)$ ,  $r_T = (r_1 r_2) / (r_1 + r_2)$
13. **Kirchoff's I law** : The algebraic sum of currents at a junction of electrical circuit is zero  $\sum I = 0$ .  
I law is a consequence of conservation of charge.  
**Kirchoff's II law** : The algebraic sum of EMF'S and products of currents and resistances in a closed loop of electrical circuit is zero  $\sum Ir + \sum \mathcal{E} = 0$ .  
II law is a consequence of conservation of energy.
14.  $P/Q = R/S$ , condition for balance in Wheatstone's bridge, where the letters P,Q,R & S are four resistances at the 4 arms of the bridge.
15. Potential Gradient  $K = V/L = ir$  where r is resistance per unit length of the potentiometer wire.  
Unit V/m
16. Emf of secondary cell  $\mathcal{E} = kl = irl$ , l is the balancing length for null deflection.
17. Heat energy  $H = I^2 R t = V I t = V^2 t / R$ , where V, potential difference applied, I current, R resistance of the coil.
18.  $P = H/t = I^2 R = V^2 / R = VI$ , is the power dissipated.
19. Temperature coefficient of resistance  $\alpha = (R_2 - R_1) / R_1 (t_2 - t_1)$
20. For power dissipation to be maximum, external resistance = internal resistance.
21. When P and Q are in the left and right gap respectively of a metre bridge,  $P/Q = l_1 / (100 - l_1)$ .
22. internal resistance of cell by potentiometer  $r = (l_1 / l_2 - 1) R$
23. Ratio of emf's  $\mathcal{E}_1 / \mathcal{E}_2 = l_1 / l_2$ .

### MAGNETIC EFFECTS OF CURRENT & MAGNETISM

1. Force experienced by a moving charge  $q$  in a magnetic field  $F = qvB \sin\theta$ .
2. Magnetic flux  $\Phi = BA \cos\theta$ . Unit weber
3. Biot Savart Law  $dB = \mu_0 I dl \sin\theta / 4\pi r^2$ , magnetic induction or field due to a current element carrying a current  $I$ . unit tesla
4. Magnetic field due to a circular coil carrying current  $B = \mu_0 I / 2r$ , at the centre. Unit tesla or  $Wb/m^2$   
for any circular section  $B = (\mu_0 I / 2r) \theta / 360^\circ$   
at any axial point at a distance  $x$  from the centre of a circular coil of radius  $a$  having  $n$  turns

$$B = \frac{\mu_0 n I a^2}{2(a^2 + x^2)^{3/2}}$$

5. Magnetic field due to a straight conductor carrying current.  $B = \mu_0 I / 2\pi r$ .
6. Magnetic field due to a solenoid along its axis  $B = \mu_0 n I$ ,  $n$  number of turns / unit length.
7. Magnetic field due to a solenoid at its ends  $B = \mu_0 n I / 2$
8. Charged particle moving perpendicular to a uniform magnetic field  
radius of circular path  $r = mv / qB$   
  
period of revolution  $T = 2\pi m / qB$
9. Force experienced by a current carrying conductor in a magnetic field  $F = B I \sin\theta$ .
10. Force between two parallel current carrying conductors  $F = \mu_0 I_1 I_2 l / 2\pi r$ .
11. Torque experienced by a current loop in a magnetic field  $\tau = N A B I \sin\theta$ .  
 $\tau = M B \sin\theta$
12. Potential energy of a magnetic dipole  $U = -M B \cos\theta$ .  
Work done in changing its orientation  $U = M B (\cos\theta_f - \cos\theta_i)$
13. Current Sensitivity of a galvanometer  $= \theta / I = N B A / k$ .  
Voltage Sensitivity of a galvanometer  $= N B A / k R$  It is independent of number of turns of the coil.
14. By connecting a small resistance called shunt  $S$  in parallel a galvanometer can be converted into an

ammeter  $S = I_g G / I - I_g$ .

15. By connecting a high resistance in series to a galvanometer it can be converted into a voltmeter  $R = V / I_g - G$ .

16. Frequency of cyclotron  $\nu = qB / 2\pi m$ .

17. Kinetic energy of a charged particle in a magnetic field  $= q^2 B^2 R^2 / 2m$ .

18. Magnetic moment  $M = 2lm$ ,  $m$  – pole strength,  $2l$  – length of magnetic dipole. Unit  $\text{Am}^2$

19. Magnetic field due to a short bar magnet at a point along its axial line  $B = \mu_0 2M / 4\pi r^3$ .

20. Magnetic field due to a short bar magnet at a point along its equatorial line  $B = \mu_0 M / 4\pi r^3$ .

21. Magnetic moment  $M$  of a current loop  $M = IA$ . Unit  $\text{Am}^2$

22. Magnetising field strength  $H = nl$  or  $B / \mu$  unit  $\text{A/m}$

23. Intensity of magnetization  $I = \text{Magnetic Moment} / \text{volume of the specimen} = M / V$   
 $= \text{pole strength} / \text{area} = m / A$ . unit  $\text{A/m}$

24. Magnetic Susceptibility  $\chi = I / H$ .

It is the ratio of Intensity of magnetization to Magnetising field strength. no unit, -ve for diamagnetic, low +ve for paramagnetic and high +ve for ferromagnetic.

25. Relative Permeability  $\mu_r = \mu / \mu_0 = B / B_0$ . Less than 1 for diamagnetic, slightly greater than 1 for paramagnetic and very large for ferromagnetic.

26. Declination  $\theta$ , is the angle between the magnetic meridian and geographic meridian at a place.

27. Angle of dip or inclination  $\delta$ , it is the angle made by total intensity of earth's magnetic field  $B$  with horizontal component  $B_H$ .

28.  $B_H$ , it is the component of earth's magnetic field  $B$  in the horizontal direction.

29. At poles  $\delta = 90^\circ$ ,  $B_v = B$ ,  $B_H = 0$ . at equator  $\delta = 0^\circ$ ,  $B_v = 0$ ,  $B_H = B$

30.  $B_H = B \cos \theta$ , horizontal component.  $B_v = B \sin \theta$ , vertical component of earth's magnetic field.  
 $B = (B^2 \cos^2 \theta + B^2 \sin^2 \theta)^{1/2}$ .

## ELECTROMAGNETIC INDUCTION & ALTERNATING CURRENT

1. **Faraday's I law:** Whenever there is a change in magnetic flux linked with a coil, there is an emf induced in the coil and it lasts as long as there is a change in magnetic flux.

**Faraday's II law:** The magnitude of the emf induced is directly proportional to the rate of change of magnetic flux linked with the coil.  $\epsilon \propto d\phi/dt$ .

2. **Lenz's law :** The current induced in the circuit always flows in a direction such as to oppose the cause or change that produced it. induced emf  $\epsilon = - d\phi/dt$ .

### 3. Methods of inducing emf

i) induced emf  $\epsilon = -A \cos\theta dB/dt$  ii)  $\epsilon = -B \cos\theta dA/dt$  iii)  $\epsilon = -BA d(\cos\theta)/dt$  .

4. induced emf  $\epsilon = -BLV$ , L length of the conductor , V speed of motion of the conductor in a perpendicular magnetic field B.

5. In AC generator , induced emf  $\epsilon = NBA\omega \sin\omega t$ , N number of turns of coil, A area of coil,  $\omega$  angular frequency of the coil.

6. induced emf between the ends of a metal rod rotating with a frequency  $\nu$  in a perpendicular magnetic field  $\epsilon = \pi B l^2 \nu$ .

7. Magnetic flux in a coil of self inductance L,  $\phi = LI$  , self induced emf  $\epsilon = -L di/dt$ .

8. Magnetic flux linked in a coil of by mutual inductance M ,  $\phi_2 = M i_1$  ,  $\epsilon_2 = -M di_1/dt$  .

9. Energy stored in a current carrying inductor  $U = \frac{1}{2} LI^2$ .

Energy density of a current carrying inductor =  $\frac{1}{2} B^2/\mu_0$  .

10. Self inductance of a solenoid  $L = \mu_0 N^2 A/l$ .

Mutual inductance of a pair of solenoids of same lengths , same C.S.area ,  $M = \mu_0 N_1 N_2 A/l$ .

11. Equations of instantaneous current I and emf  $\epsilon$   $I = I_0 \sin\omega t$  ,  $\epsilon = \epsilon_0 \sin\omega t$ .

12. R.M.S value of current and emf  $I_{rms} = I_0/\sqrt{2}$  ,  $\epsilon_{rms} = \epsilon_0/\sqrt{2}$ .

13. In an ac circuit with inductor L emf leads the current by  $\pi/2$ . power factor =  $\cos\phi = 0$

inductive reactance  $X_L = 2\pi\nu L$ .

$X_L$  is the opposition to the flow of current by offered L .  
Power dissipated in a full cycle of AC is zero.

14. In an ac circuit with capacitor C , the current leads emf by  $\pi/2$ .

power factor =  $\cos\phi = 0$

Capacitive reactance  $X_C = 1/2\pi\nu C$ .

$X_C$  is the opposition to the flow of current offered by C .

Power dissipated in a full cycle of AC is zero.

15. In an AC circuit with inductance , capacitance ,& resistance, when  $X_L = X_C$  the circuit is in **resonance** . Current and emf are in phase with each other.

power factor =  $\cos\phi = 1$

Power dissipated in a full cycle of AC is  $P = \epsilon_{rms} I_{rms} = \frac{1}{2} \epsilon_o I_o$

Current is maximum.

Opposition to the flow of current offered by combination of reactance and resistance is impedance Z .

$Z=R$  and it is minimum in a resonance circuit.

16. Resonance is used i) in tuning TV and radio ii) remote control devices iii) metal detector.

17. When a metallic conductor is placed in a varying magnetic field , closed loops of currents are produced. They are known as Eddy currents.


Uses : i) brakes in electric trains ii) induction furnaces

iii) speedometers iv) damping of galvanometers.

Limitation : cause power loss in transformers.

18. Transformer

It steps up or down Ac voltage by mutual induction between pair of coils primary and secondary , wound on ferromagnetic core.

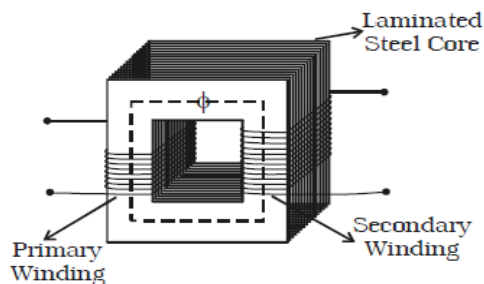

Step up transformer.

19. For an ideal transformer, input power = output power

$$E_p I_p = E_s I_s$$



$$\frac{E_s}{E_p} = \frac{N_s}{N_p} = \frac{I_p}{I_s} = k$$

where  $k$  is called transformer ratio.

(for step up transformer  $k > 1$  and

for step down transformer  $k < 1$ )

**20. Efficiency** of a transformer is defined as the ratio of output power to the input power.

The efficiency  $\eta = 1$  (ie. 100%), only for an ideal transformer where there is no power loss. But practically there are numerous power losses in a transformer like hysteresis loss, eddy current loss and hence the efficiency is always less than one.

**21. Types of power loss and methods of minimising**

**Hysteresis loss** – minimized by core made of mumetal and silicon steel

**Copper loss**- minimized by thick wires with considerably low resistance are used .

**eddy current loss**- minimized by laminated core made of stelloy, an alloy of steel

**flux loss**- minimized by using a shell type core

## **ELECTROMAGNETIC WAVES & COMMUNICATION SYSTEM**

- EM waves are variations in electric field and magnetic field which are perpendicular to each other and perpendicular to the the direction of propagation of waves .
- Equations of EM waves propagating in x direction  
 $B_y = B_0 \sin(kx + \omega t)$  ;  $E_z = E_0 \sin(kx + \omega t)$  where  $k = 2\pi/\lambda$  and  $\omega = 2\pi\nu$  .
- $C = \nu \lambda = 1/(\nu\mu_0\epsilon_0) = 1/(\nu\mu\epsilon) = E_0/B_0$  ,  $C = 3 \times 10^8$  m/s .
- $m(t) = A_m \sin \omega_m t$  message signal ,  $C(t) = A_c \sin \omega_c t$  , carrier wave, amplitude modulated wave  
 $C_m(t) = A_c \sin \omega_c t + \mu A_c / 2 (2\pi(\nu_c - \nu_m)) - \mu A_c / 2 (2\pi(\nu_c + \nu_m))$ . where A- amplitude  $\omega$  – angular frequency ,  $\nu$  frequency.
- USB- upper side band frequency  $(\nu_c + \nu_m)$  . LSB- lower side band frequency  $(\nu_c - \nu_m)$   
 Band width =  $2 \nu_m$ .
- Modulation index or factor  $\mu = M = A_m/A_c$  , it must always be less than 1 or 100% to minimize distortion of signal.
- The distance covered by transmission from a tower  $d = (\sqrt{2Rh})$ .  $R$  –radius of earth ,  $h$ - height of transmitting antenna.
- Range of transmission  $A = \pi d^2$  ,  $d = (\sqrt{2Rh})$ .
- number of people covered = population density  $\times A$  ,  $A = \pi d^2$
- length of antenna =  $\lambda/4$  ,  $\lambda$  wavelength of wave transmitted.
- Modulation index or factor  $\mu = M = (A_c - A_m) / (A_c + A_m)$
- Displacement current it is the current due to rate of change of electric field between the plates of a capacitor getting charged.  $I_d = \epsilon_0 A (dE/dt)$  .

It is equal to conduction current.

### **RAY OPTICS ,WAVE OPTICS & OPTICAL INSTRUMENTS**

1.  $r = 2f$  ,  $r$ -radius of curvature ,  $f$  – focal length of spherical mirror of small aperture.
2. Mirror formula  $1/f = 1/u + 1/v$  ,  $f$ - focal length of spherical mirror ,  $u$  –object distance ,  $v$ - image distance. magnification  $m = -(v/u) = h_i/h_o$  ,  $h_i$  - height/size of image,  $h_o$  - height/size of object .
3. Critical angle  $i_c$  is the angle of incidence in the denser medium above which total internal reflection takes place.
4. Refractive index of a denser medium in terms
  - i) of Critical angle  $i_c$   $n = 1/\sin i_c$
  - ii) of speed of light  $n = C/V$  ,  $C$ - speed of light in vacuum ,  $V$ - speed of light in medium
  - iii)  $n = \text{apparent depth} / \text{actual depth}$  for observer under water
  - iv)  $n = \text{actual depth} / \text{apparent depth}$  for an observer in air
  - v)  $n = \tan i_p$   $i_p$  – polarising angle
  - vi)  $n = \sin i / \sin r = (\sin(A+D) / 2) / \sin A / 2$  in a prism  $A$  angle of the prism ,  $D$  angle of minimum deviation.
5. VIBGYOR - Physical quantities which **increase** from **violet to Red** are wavelength, speed in a glass prism or slab, focal length of a lens w.r.to colour , band width of interference pattern  
  
Physical quantities which **increase** from **red to violet** are frequency, energy, angle of deviation, lateral deviation, amount of scattering in the atmosphere, refractive index, power of a lens , resolving power of a microscope,telescope.
6. Rayleigh's law of scattering : amount of light scattered in the atmosphere is inversely proportional to fourth power of wavelength.
7. Lens maker's formula  $1/f = (n_2 - n_1) / n_1 (1/R_1 - 1/R_2)$  ,  $n_2$  - refractive index of lens,  $n_1$ - refractive index of surrounding medium ,  $R_1$  ,  $R_2$  are radii of curvature of the two surfaces of a lens.  
**when  $n_2 < n_1$  , the convex lens diverges & concave lens converges,**  
**when  $n_2 = n_1$  , no refraction will take place and the lens is invisible**  
**when  $n_2 > n_1$  , lenses refract in normal way, ie convex converges & concave diverges.**
8. Power of a lens is the reciprocal of its focal length  $P = 1/f$  unit dioptre.  
Power of lenses in combination is  $P = P_1 + P_2 + P_3 + \dots$
9. Magnifying power of a simple microscope when the image is formed at
  - i) Near point  $M = 1 + D/f$  where  $D = 25\text{cm}$  ,  $f$  focal length of convex lens
  - ii) infinity (normal adjustment position)  $M = D/f$

10. Magnifying power of a compound microscope when the image is formed at i ) Near point  
 $M = L/f_o (1+D/f_e)$

ii) infinity (normal adjustment position)  $M = LD/ f_o f_e$  L - length of microscope.

11. Magnifying power of an astronomical telescope when the image is formed at i ) Near point

$M = (f_o/ f_e)(1+ f_e/D)$  , ii) ii) infinity (normal adjustment position)  $M = f_o/ f_e$

$f_o$ - focal length of objective lens  $f_e$ - focal length of eye piece

L - length of telescope  $L = f_o + f_e$

12. Resolving Power of a microscope is the reciprocal of its limit of resolution  $d_{min}$

$R.P = 1/ d_{min} = 2n \sin \beta / 1.22 \lambda$  ,  $n \sin \beta$  – is numerical aperture ,  $\lambda$ - wave length of light used.

n – refractive index of medium between objective and objective lens

13. Resolving Power of a telescope is the reciprocal of its limit of resolution  $d_{min}$

$R.P = 1/ d_{min} = D/ 1.22 \lambda$  , D – aperture or diameter of objective lens

14. Malus law :When polarised light is passed through an analyser the Intensity of Light 'I' emerging from it is  $I = I_o \cos^2 \theta$  ,  $I_o$  Intensity of incident Light ,  $\theta$  – between the plane of transmission of polariser and analyser.

15. Resultant Intensity of Light at a point on the screen when light waves of intensity  $I_1$  &  $I_2$  arrive at the point with a phase difference of  $\phi$  is  $I = I_1 + I_2 + 2\sqrt{I_1 I_2} \cos \phi$

16. Condition for maxima & minima in Young's double slit experiment

For Maxima Path difference  $\delta = xd/D = n\lambda$  ,  $n=0,1,2,3...$  Phase difference  $= 2n\pi$

For minima Path difference  $\delta = xd/D = (2n-1)\lambda/2$   $n = 1,2,3,...$

d – separation between two slits , D- separation between the plane of the slits and the screen

x- separation between the central bright band and a point P

17. Band width or fringe width is the separation between two successive bright fringes or dark fringes

$\beta = \lambda D/d$  .

18.  $I_{max} \propto (a_1 + a_2)^2$  ,  $I_{min} \propto (a_1 - a_2)^2$   $a_1, a_2$  are the amplitudes of two waves interfering

$w_1 / w_2 = I_1 / I_2 = a_1^2 / a_2^2$  where  $w_1$  and  $w_2$  are the widths of the two slits.

19. Width of central maximum  $w = 2 \lambda D/d$  d – width of the single slit.

20. When the Young's double slit set up is kept in a transparent medium of refractive index n

the band width becomes  $\beta' = \lambda D/ nd$  .

## DUAL NATURE OF MATTER & PHOTOELECTRIC EFFECT

1. De Broglie relation  $\lambda = h/mv = h/p$
2. For electron accelerated by a p.d of  $V$  volt,  $\lambda = 12.27/\sqrt{V}$  angstrom
3. Graph between kinetic energy of electron along y-axis & frequency along X-axis gives
  - a) threshold frequency = X intercept
  - b) Slope = Planck's constant
  - c) work function = -ve of y intercept.
4. Photoelectric current  $\propto$  intensity of incident radiation  
P.E. current does not depend on frequency, stopping potential.
5. Kinetic energy of photoelectron  $\propto$  frequency of incident radiation,  
K.E is less for a photosensitive material with more work function .  
K.E depends on stopping potential but not on intensity of incident radiation.
6. Einstein's equation for photoelectric emission  $K.E = h\nu - h\nu_0$ .  
  
If  $\nu < \nu_0$ , No photoelectric emission, If  $\nu = \nu_0$ , No photoelectric current as emitted photo electrons have zero kinetic energy, If  $\nu > \nu_0$  there is photoelectric current.
7. Matter in motion is associated with waves called matter waves.
8. Davisson and Germer experiment verified the existence of matter waves.
9. Electron waves are used in electron microscope, as they can be focused by electric & magnetic fields  
electron microscope is an application of matter waves.
10. Even though X-rays have same wave length as that of electron waves, they cannot be used in electron microscopes because, X-rays are em waves which cannot be focused by electric & magnetic fields.
11. Photo electric emission is possible in many photo sensitive materials with UV rays as they have more frequency and energy than visible and IR rays.
12. Wave length of electron waves detected in Davisson and Germer experiment is  $1.66 \text{ \AA}$ .
13. Photo electric cells are vacuum tubes with concave cathode electrodes coated with caesium, which has low work function, anode platinum wire at the focus of cathode to collect more photoelectrons emitted.
14. Uses of photo electric cells : in cinema to record & reproduce sound in films, burglar and fire alarms.

## ATOMS & NUCLEI.

1. Distance of closest approach = radius of nuclear radius =  $r = \frac{2Ze^2}{4\pi\epsilon_0 \times KE}$ ,  $e$  - electronic charge,  $Z = 79$  for Au nucleus,  $\epsilon_0$  - permittivity of free space.

2.  $r = r_0 A^{1/3}$ ,  $A$  - mass number of the nucleus,  $r_0 = 1.2 \text{ F} = 1.2 \times 10^{-15} \text{ m}$

3. Nuclear density  $D = \frac{3 m_n}{4\pi r_0^3}$ ,  $r_0 = 1.2 \text{ F} = 1.2 \times 10^{-15} \text{ m}$ ,  $m_n = 1.66 \times 10^{-27} \text{ kg}$ .  
Nuclear density  $D$  is the same for all the nuclei.

4. energy equivalent of  $1 \text{ amu} = 931 \text{ MeV}$

5. Mass defect = difference in between total mass of constituents of a nucleus and actual mass of the nucleus ( Or) difference between mass of the reactants and mass of the products.

6. Binding energy = Mass defect in  $\text{amu} \times 931 \text{ MeV}$ .

Most stable nucleus is Fe-56 .

Nuclei with mass number below 20 undergo fusion to form stable nuclei of high BE/A

Nuclei with mass number above 200 undergo fission to form stable nuclei of high BE/A

7. In alpha emission  $A$  decreases by 4 &  $Z$  decreases by 2

In  $\beta^+$  emission no change in  $A$ ,  $Z$  decreases by 1.

In  $\beta^-$  emission  $Z$  no change in  $A$ ,  $Z$  increases by 1.

In gamma emission No change in either  $A$  or  $Z$ , but energy decreases by gamma emission to attain stability.

$n/p$  ratio increases in  $\alpha$ ,  $\beta^+$  emission

$n/p$  ratio decreases in  $\beta^-$  emission

8. Half life  $T = 0.693/\lambda$ ,  $\lambda$  - decay constant,  $T$  half life.

It is the time taken for half the amount of radioactive substance to decay .

9. Mean life  $\tau = 1/\lambda$ , reciprocal of decay constant.

It is defined as the time taken for the radioactive substance to become 37% of initial value.

10. Total energy of electron  $E_T = -E_k$ ,  $E_T = \frac{1}{2} E_p$   $E_k$  = kinetic energy,  $E_k$  = potential energy.

11. Impact parameter : It is the perpendicular distance between the initial velocity vector of alpha particle from the centre of the nucleus .

12. angle of scattering is inversely proportional to impact parameter.

13. Moderator - slows down fast neutrons to slow neutrons by repeated elastic collisions of neutrons with moderator atoms eg. Heavy water, graphite

14. control rod – cadmium or boron rods which are good absorbers of neutrons and can control the rate of nuclear fission reaction by their level of insertion between fuel rods .

15. coolant – it is used to transfer lot of heat energy generated in the reactor to water to change it into steam for power generation .eg. Heavy water or liquid sodium.

16. enriched Uranium has 2-5% of fissionable(fissile ) U-235 and remaining fertile (un fissionable) U-238.

17. Zero energy reactors they do not produce power but i) they produce radioactive isotopes like Co-60, I-131 etc.ii) used to perform neutron diffraction experiments

### SOLIDS & SEMICONDUCTOR DEVICES

1.  $n_i^2 = n_e \times n_h$  ,  $n_i$  intrinsic carrier concentration,  $n_e$  ,  $n_h$  electron and hole concentration in an extrinsic semiconductor.

2.  $I_E = I_B + I_C$  , E – emitter .B- base ,C- collector of a transistor I –current.

3.  $\alpha = I_C / I_E$  current gain in Common –base mode.

4.  $\beta = I_C / I_B$  current gain in Common –emitter mode.

5.  $\beta = \alpha / (1-\alpha)$

6. Voltage gain  $A_v = \beta \times R_L / R_i$

7. Power gain  $P = A_v \times \beta = \beta^2 \times R_L / R_i$

8. Output voltage in common emitter  $V_{CE} = V_{CC} \times I_C \times R_L$ .

9. NAND, NOR gates are known as universal logic gates as other gates can be obtained from these gates

10 .

S.no	Diode	Bias	uses
1	P-n junction	Forward	Rectifier – to change ac to dc voltage
2	Zener	Reverse , heavily doped	Voltage regulator –to give constant voltage
3	Photo diode	Reverse	Sensor, fire alarm , burglar alarm
4	LED	Forward	Lighting source, Television, display in digital circuits
5	Solar cell	Source of emf ,self bias	In calculators ,watches , solar panels in satellites

11. transistors can be used as amplifiers , oscillators and switches